Kaatokarkelot

Oil Pattern Distance:	**42 Feet**	**Reverse Brush Drop:**	35 Feet	**Oil Per Board:**	**40 uL**
Forward Oil Total:	12.32 mL	**Reverse Oil Total:**	8.16 mL	**Volume Oil Total:**	20.48 mL
Forward Boards Crossed:	308 Boards	**Reverse Boards Crossed:**	204 Boards	**Total Boards Crossed:**	512 Boards

	Start	Stop	Loads	Speed	Crossed	Start	End	Feet	T.Oil
1	2L	2R	2	18	74	0.0	2.5	2.5	2960
2	6L	6R	1	18	29	2.5	5.0	2.5	1160
3	8L	8R	2	18	50	5.0	10.1	5.1	2000
4	10L	10R	3	18	63	10.1	17.7	7.6	2520
5	12L	12R	3	22	51	17.7	27.0	9.3	2040
6	13L	13R	2	22	30	27.0	33.2	6.2	1200
7	15L	15R	1	22	11	33.2	36.3	3.1	440
8	2L	2R	0	22	0	36.3	42.0	5.7	0

Forward | Reverse | More

	Start	Stop	Loads	Speed	Crossed	Start	End	Feet	T.Oil
1	2L	2R	0	30	0	42.0	34.0	-8.0	0
2	13L	13R	2	22	30	34.0	27.8	-6.2	1200
3	12L	12R	2	18	34	27.8	22.7	-5.1	1360
4	10L	10R	3	18	63	22.7	15.1	-7.6	2520
5	8L	8R	2	18	50	15.1	10.0	-5.1	2000
6	7L	7R	1	14	27	10.0	8.1	-1.9	1080
7	2L	2R	0	14	0	8.1	0.0	-8.1	0

Forward | Reverse | More

Conditioner: Type In or Select One


TransferType: Type In or Select One

Forward

Reverse

Combined

Buff

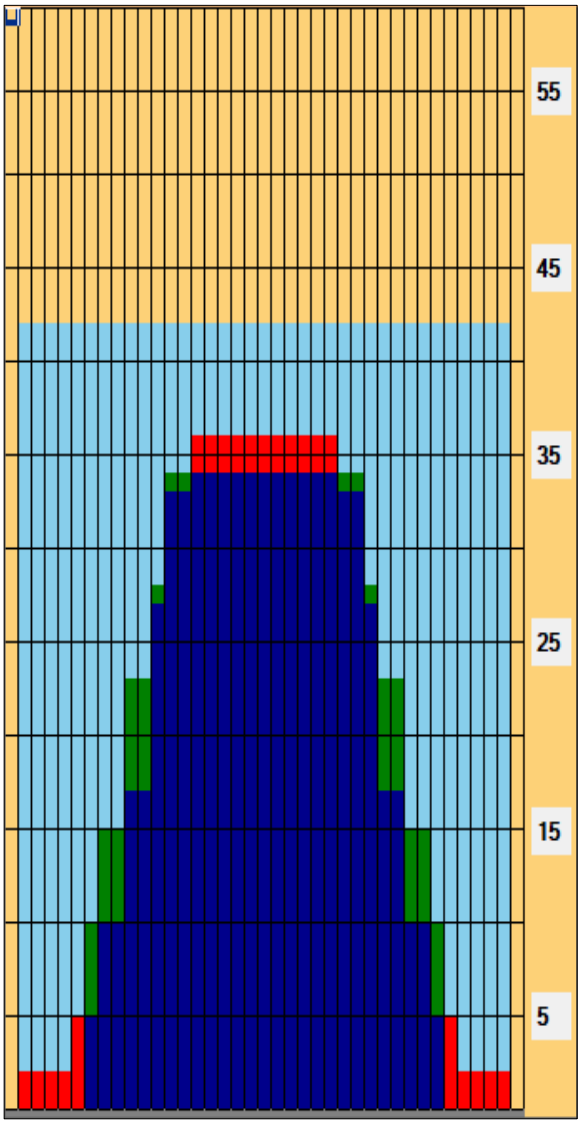

Designed for use in machines with the TRANSFER BRUSH conditioning system. Kustodian Walker, Ion, K Plus or transfer brush upgraded machines.

Item Description	3L-7L:18L-18R Outside Track:Middle	8L-12L:18L-18R Middle Track:Middle	13L-17L:18L-18R Inside Track:Middle	18L-18R:17R-13R Middle: Inside Track	18L-18R:12R-8R Middle:Middle Track	18L-18R:7R-3R Middle:Outside Track
Track Zone Ratio	9.23	1.9	1.02	1.02	1.9	9.23

