STRIKE BACK 2022

Oil Pattern Distance:	**41 Feet**	**Reverse Brush Drop:**	37 Feet	**Oil Per Board:**	**40 uL**
Forward Oil Total:	11.64 mL	**Reverse Oil Total:**	10 mL	**Volume Oil Total:**	21.64 mL
Forward Boards Crossed:	291 Boards	**Reverse Boards Crossed:**	250 Boards	**Total Boards Crossed:**	541 Boards

	Start	Stop	Loads	Speed	Crossed	Start	End	Feet	T.Oil
1	3L	3R	2	18	70	0.0	2.5	2.5	2800
2	7L	7R	1	18	27	2.5	5.0	2.5	1080
3	9L	9R	2	18	46	5.0	10.1	5.1	1840
4	10L	10R	3	18	63	10.1	17.7	7.6	2520
5	11L	11R	2	18	38	17.7	22.8	5.1	1520
6	12L	12R	2	22	34	22.8	29.0	6.2	1360
7	14L	14R	1	22	13	29.0	32.1	3.1	520
8	2L	2R	0	26	0	32.1	41.0	8.9	0

Forward | Reverse | More

	Start	Stop	Loads	Speed	Crossed	Start	End	Feet	T.Oil
1	2L	2R	0	30	0	41.0	35.0	-6.0	0
2	13L	13R	3	22	45	35.0	25.7	-9.3	1800
3	12L	12R	2	18	34	25.7	20.6	-5.1	1360
4	10L	10R	3	18	63	20.6	13.0	-7.6	2520
5	9L	9R	2	14	46	13.0	9.1	-3.9	1840
6	8L	8R	1	14	25	9.1	7.2	-1.9	1000
7	2L	2R	1	14	37	7.2	5.3	-1.9	1480
8	2L	2R	0	14	0	5.3	0.0	-5.3	0

Forward | Reverse | More

Conditioner: Type In or Select One


TransferType: Type In or Select One

Forward

Reverse

Combined

Buff

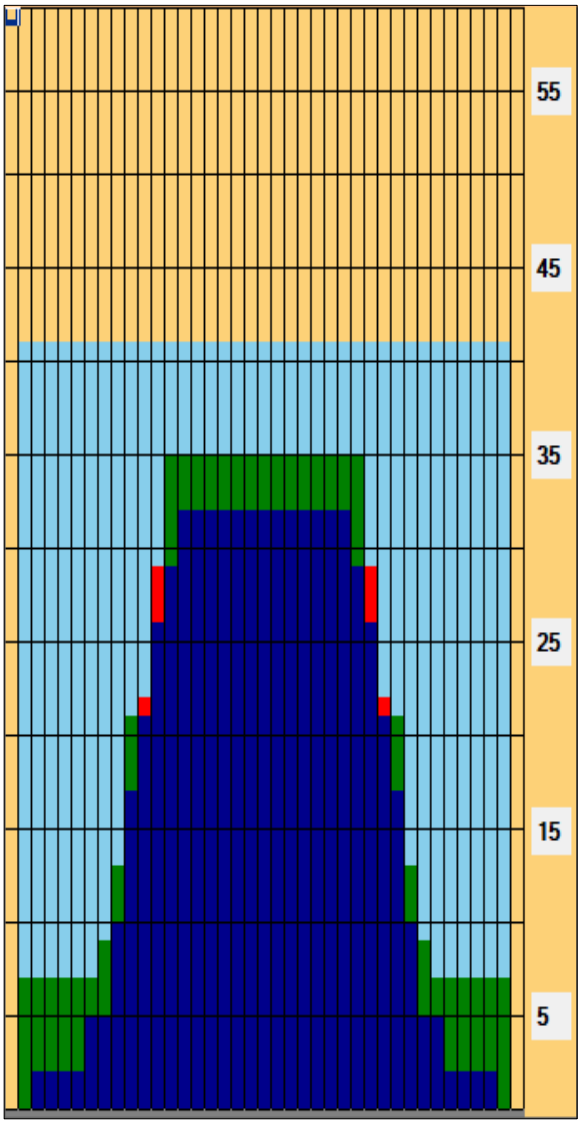

Designed for use in machines with the TRANSFER BRUSH conditioning system. Kustodian Walker, Ion, K Plus or transfer brush upgraded machines.

Item Description	3L-7L:18L-18R Outside Track:Middle	8L-12L:18L-18R Middle Track:Middle	13L-17L:18L-18R Inside Track:Middle	18L-18R:17R-13R Middle: Inside Track	18L-18R:12R-8R Middle:Middle Track	18L-18R:7R-3R Middle:Outside Track
Track Zone Ratio	7.81	1.87	1.01	1.01	1.87	7.81

