SENIORIT 3

Oil Pattern Distance:	**42 Feet**	**Reverse Brush Drop:**	34 Feet	**Oil Per Board:**	**40 uL**
Forward Oil Total:	13.56 mL	**Reverse Oil Total:**	6.56 mL	**Volume Oil Total:**	20.12 mL
Forward Boards Crossed:	339 Boards	**Reverse Boards Crossed:**	164 Boards	**Total Boards Crossed:**	503 Boards

	Start	Stop	Loads	Speed	Crossed	Start	End	Feet	T.Oil
1	4L	4R	3	14	99	0.0	3.9	3.9	3960
2	6L	6R	1	14	29	3.9	5.8	1.9	1160
3	8L	8R	2	18	50	5.8	10.9	5.1	2000
4	10L	10R	4	22	84	10.9	23.3	12.4	3360
5	12L	12R	2	22	34	23.3	29.5	6.2	1360
6	13L	13R	2	22	30	29.5	35.7	6.2	1200
7	14L	14R	1	26	13	35.7	39.3	3.6	520
8	2L	2R	0	26	0	39.3	42.0	2.7	0

Forward | Reverse | More

	Start	Stop	Loads	Speed	Crossed	Start	End	Feet	T.Oil
1	2L	2R	0	30	0	42.0	32.0	-10.0	0
2	13L	13R	2	26	30	32.0	24.7	-7.3	1200
3	11L	11R	2	22	38	24.7	18.5	-6.2	1520
4	9L	9R	2	18	46	18.5	13.4	-5.1	1840
5	8L	8R	2	14	50	13.4	9.5	-3.9	2000
6	2L	2R	0	14	0	9.5	0.0	-9.5	0

Forward | Reverse | More

Conditioner: Type In or Select One


TransferType: Type In or Select One

Forward

Reverse

Combined

Buff

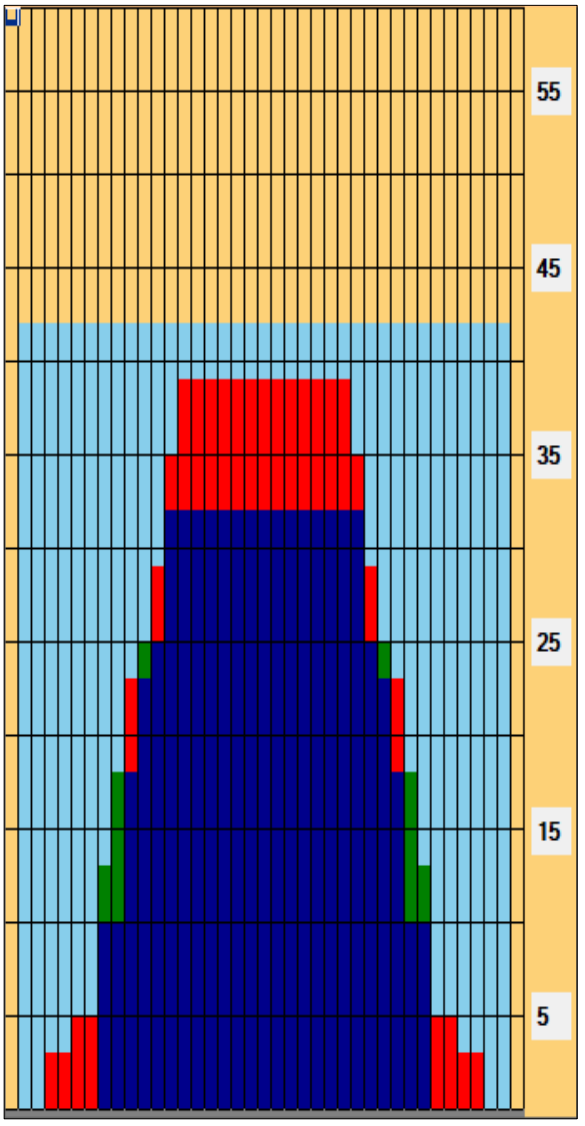

Designed for use in machines with the TRANSFER BRUSH conditioning system. Kustodian Walker, Ion, K Plus or transfer brush upgraded machines.

Item Description	3L-7L:18L-18R Outside Track:Middle	8L-12L:18L-18R Middle Track:Middle	13L-17L:18L-18R Inside Track:Middle	18L-18R:17R-13R Middle: Inside Track	18L-18R:12R-8R Middle:Middle Track	18L-18R:7R-3R Middle:Outside Track
Track Zone Ratio	8.21	1.74	1.01	1.01	1.74	8.21

